





HYDRA INFUSER

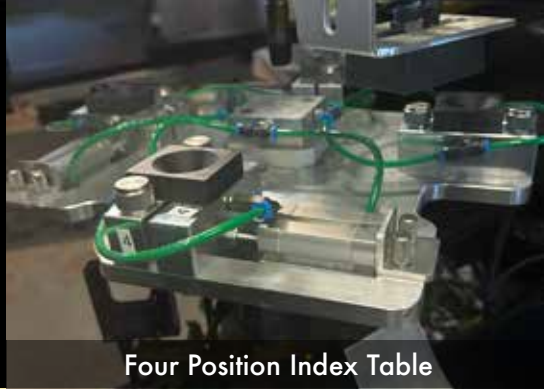

Four Position Index Table

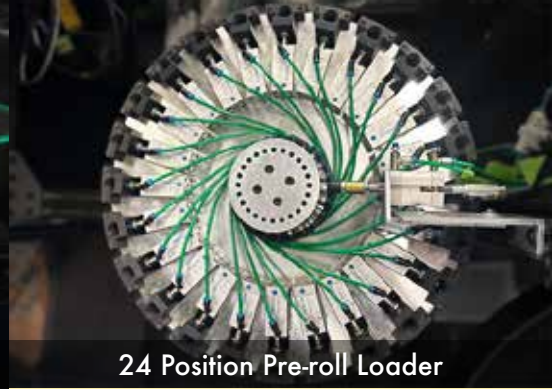

24 Position Pre-roll Loader


Hydra Infuser

Power Requirements

- 220v 30amp circuit
- 130 PSI 3 scfm

Standard Features

- 800 PICC Preroll infusion per hour
- Adjustable profile positioning
- Adjustable volume control
- (1) programmable logic controls
- (1) pneumatic manifolds
- 20 digital inputs
- 10 digital outputs
- (4) Independent heating zones
- Performance data analytics export
- Remote monitoring
- Quick change assemblies
- U/L certified electrical enclosure
- 68" H x 62" W x 68" D
- 400lbs weight

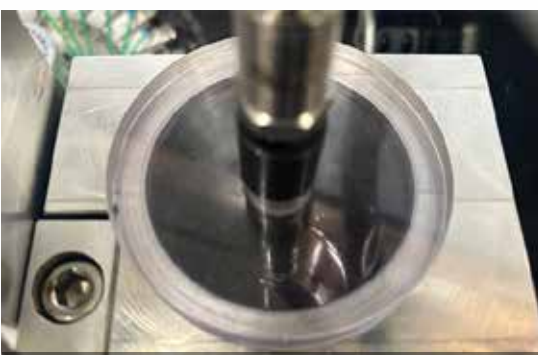

4 Zone Heating System



HMI Concentrate Core Profile Control



Infuser Needle Guide