




JPAK HYDRA



Dynamic Wheel Gate Weighing System

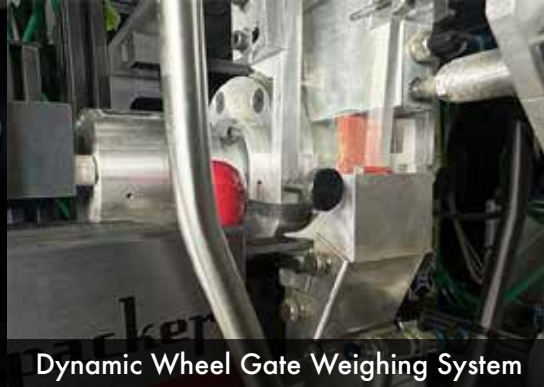

Air Pak™ Packing Head


JPAK Hydra

Power Requirements

- 220v 30amp circuit
- 130 PSI 15 scfm

Standard Features

- 430 PICC Preroll per hour
- Adjustable PICC preroll sizes
1 gram and .5 gram
- (4) programmable logic controls
- (4) pneumatic manifolds
- 80 digital inputs
- 40 digital outputs
- Performance data analytics export
- Remote monitoring
- Quick change assemblies
- Automated die cleaning system
- Integrated stop loss recovery system
- Digital adjustable positioning
- Digital pressure setting
- (2) NTEP certified scales
- U/L certified electrical enclosure
- 92" (w/ vortex) H x 136" W x 71" D
- 83" (no vortex) x H x 136" W x 71" D
- 750lbs weight

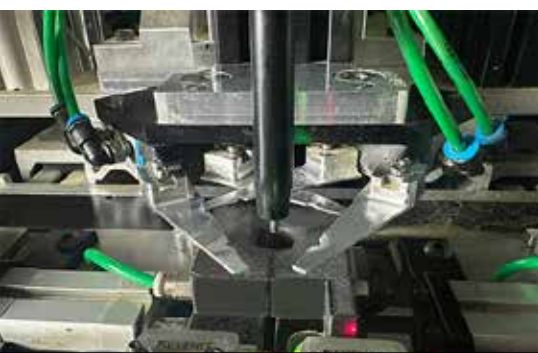

Crown Wick™ Folding Assembly



Modulated Cassette Design



Real Time Machine Data Analytics